

FIG. 2

3 / 5

METHOD
300

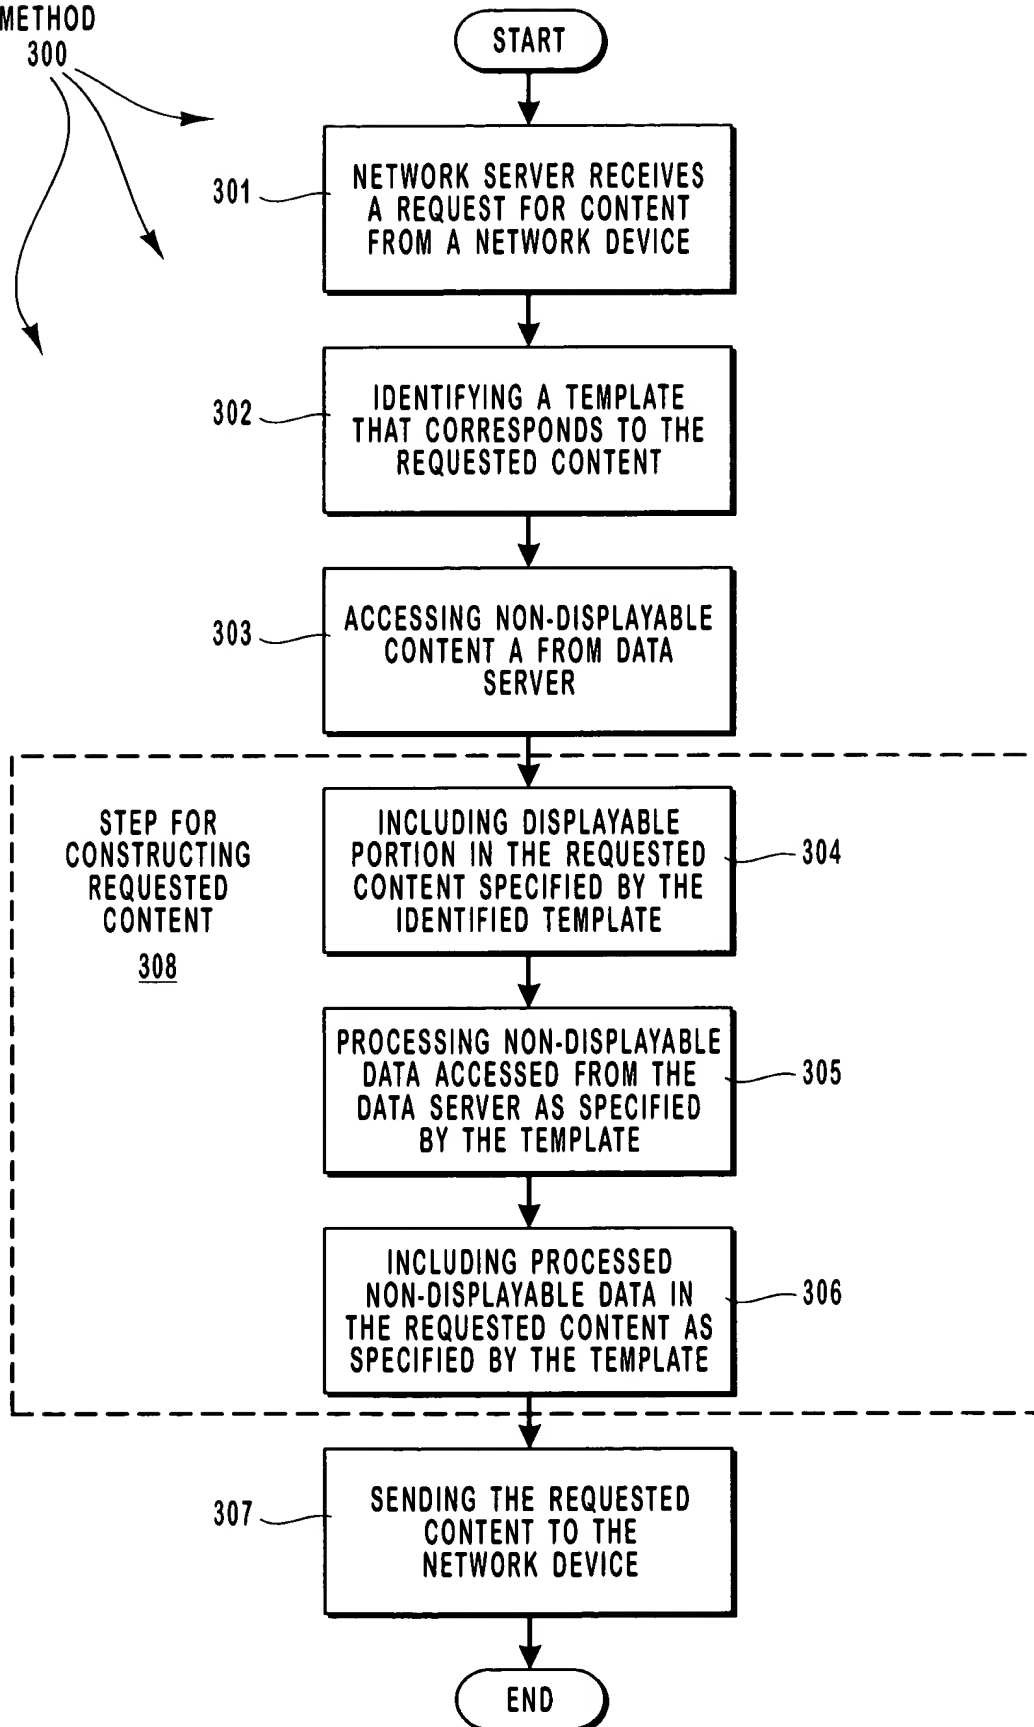


FIG. 3

```

401 — #ifdef Default Browser Type           Source Code 400
402 — <HTML>
403 — <HEAD>
404 — <TITLE>Sample Default Template</TITLE>
405 — <BODY>
406 — <A HREF="{xst:get-value type='href' for='DAV:href'}">Click here</A>
407 — </BODY>
408 — </HTML>
409 — #else
410 — <HTML>
411 — <HEAD>
412 — <TITLE>Sample Other Template</TITLE>
413 — <Body>
414 — <A HREF="{xst:get-value type='href' for='DAV:href'}">Click here</A>
415 — </BODY>
416 — </HTML>
417 — #endif

```

FIG. 4

DATA STRUCTURE
500

DATA DICTIONARY <u>501</u>
TEMPLATE CONSTANTS <u>502</u>
FUNCTIONS <u>503</u>
TOKEN INFORMATION TABLE <u>504</u>
HTML DATA <u>505</u>

FIG. 5

TOP SECRET